

VE-1x Velocity Sensor



Overview

GeoSIG's VE velocity sensors are engineered for consistent performance over a long lifetime. Advanced computerised testing, manufacturing techniques and quality control are used in the production process to provide both the uniform parameters and the rugged qualities required in modern velocity sensors.

The sensor module has proven itself successfully worldwide for many years in different applications. The symmetrical rotating dual coil construction minimises the force on the spring arms. The use of precious metals ensure optimum electrical contact and a long operating life.

VE velocity sensors operate from a wide range of input voltages and can be used for a variety of civil engineering and general vibration measurement applications. The VE-11-H is a uniaxial horizontal, VE-11-V a uniaxial vertical, VE-12 is biaxial, and VE-13 is a triaxial velocity sensor.

The VE velocity sensors are housed in a very compact 195 x 112 x 95 mm case. The sealed cast

Key Features

- ▶ Wide full scale range, ± 1 to ± 100 mm/s
- ▶ Bandwidth 1 Hz to 315 Hz
- ▶ Civil engineering and general vibration measurement applications
- ▶ Built-in impulse test circuit
- ▶ Single bolt mounted housing provides up to $\pm 10^\circ$ of levelling adjustment

aluminium housing contains an MS-style connector or a sealed cable inlet. The housing also incorporates a single bolt mount with three levelling screws, which offers extended adjusting capability during mounting.

Applications

- ▶ Civil engineering
- ▶ General vibration measurement

VE-13 / VE-12 / VE-11-V / VE-11-H Velocity Sensor

Specifications

General Characteristics

Application: Civil engineering, general vibration measurement

Configurations:


	Triaxial	Biaxial	Uniaxial	Axes	Alignment**
VE-13:	■			X – Y – Z	H – H – V
VE-12-H:		■		X – Y	H – H
VE-12-HV:		■		X (or Y) – Z	H – V
VE-11-H:			■	X (or Y)	H
VE-11-V:			■	Z	V

** H: Horizontal, V: Vertical

Full scale range: ± 100 mm/s
optional: $\pm 1, \pm 10$ mm/s

Specification

Instrument type: Digital grade long travel geo-phones
Dynamic range: > 96 dB
Linearity: $< 0.3\%$ of full scale
Cross axis sensitivity: $< 0.1\%$ of full scale
Frequency response: 1 to 315 Hz
Damping: standard 0.7
Full scale output: 0 ± 10 V differential (20 Vpp)
optional 2.5 ± 2.5 V single-ended (5 Vpp)
 0 to 20 mA current loop
Output impedance: $< 50 \Omega$
Self test: Impulse Test
Measuring range: See plot

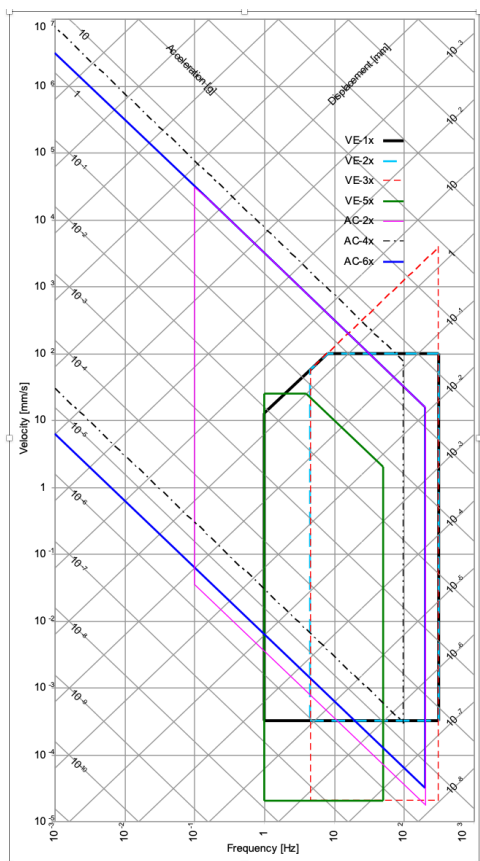

Power


Supply voltage: 9 to 15 VDC
Consumption: VE-13: 26 mA typical, 31 mA max. @15 VDC

Connector Pin Configuration

Pin 1-2, 3-4, 5-6: Signal output for axis X, Y, Z
Pin 7-8: Test input, digital test-pulse (0-12 V)
Pin 9-10: +12 VDC power supply
Pin 11-12: Sensor mode
Case: Shielded ground

Environment / Housing

Housing type: Cast aluminium
Sealed access cover
Housing size: 195 x 112 x 95 mm
Weight: 2.0 kg
Index of protection: IP65
Optional IP68
Temperature range: -25 to $+85$ °C (operating)
 -40 to $+100$ °C (storage)
Humidity: 0 to 100% (non-condensing)
Mounting: Single bolt, surface mount, adjustable within $\pm 10^\circ$

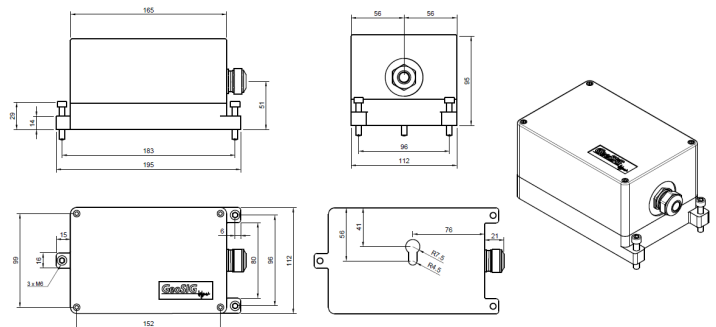

Standard VE-1x

Floor mounted, full scale ± 100 mm/s
2 m cable with sensor mating connector,
concrete anchor and user manual on CD

Options

Cable & connector: Sealed cable inlet, replaces connector;
cable with shielded twisted pairs for any length (including mating sensor connector) with open end cables for connection to GeoSIG recorder;
connector on user specification;
mounted at cable end.
Housing: Watertight IP68 housing
Stainless steel protective housing
Temperature range: -25 to $+100$ °C (operating)
Temperature output: Temperature sensing at the sensor side

Ordering Information

Specify: Type of VE-1x, full scale range, and other applicable options