


## Connectivity Options for GMS-xx Series Recorder

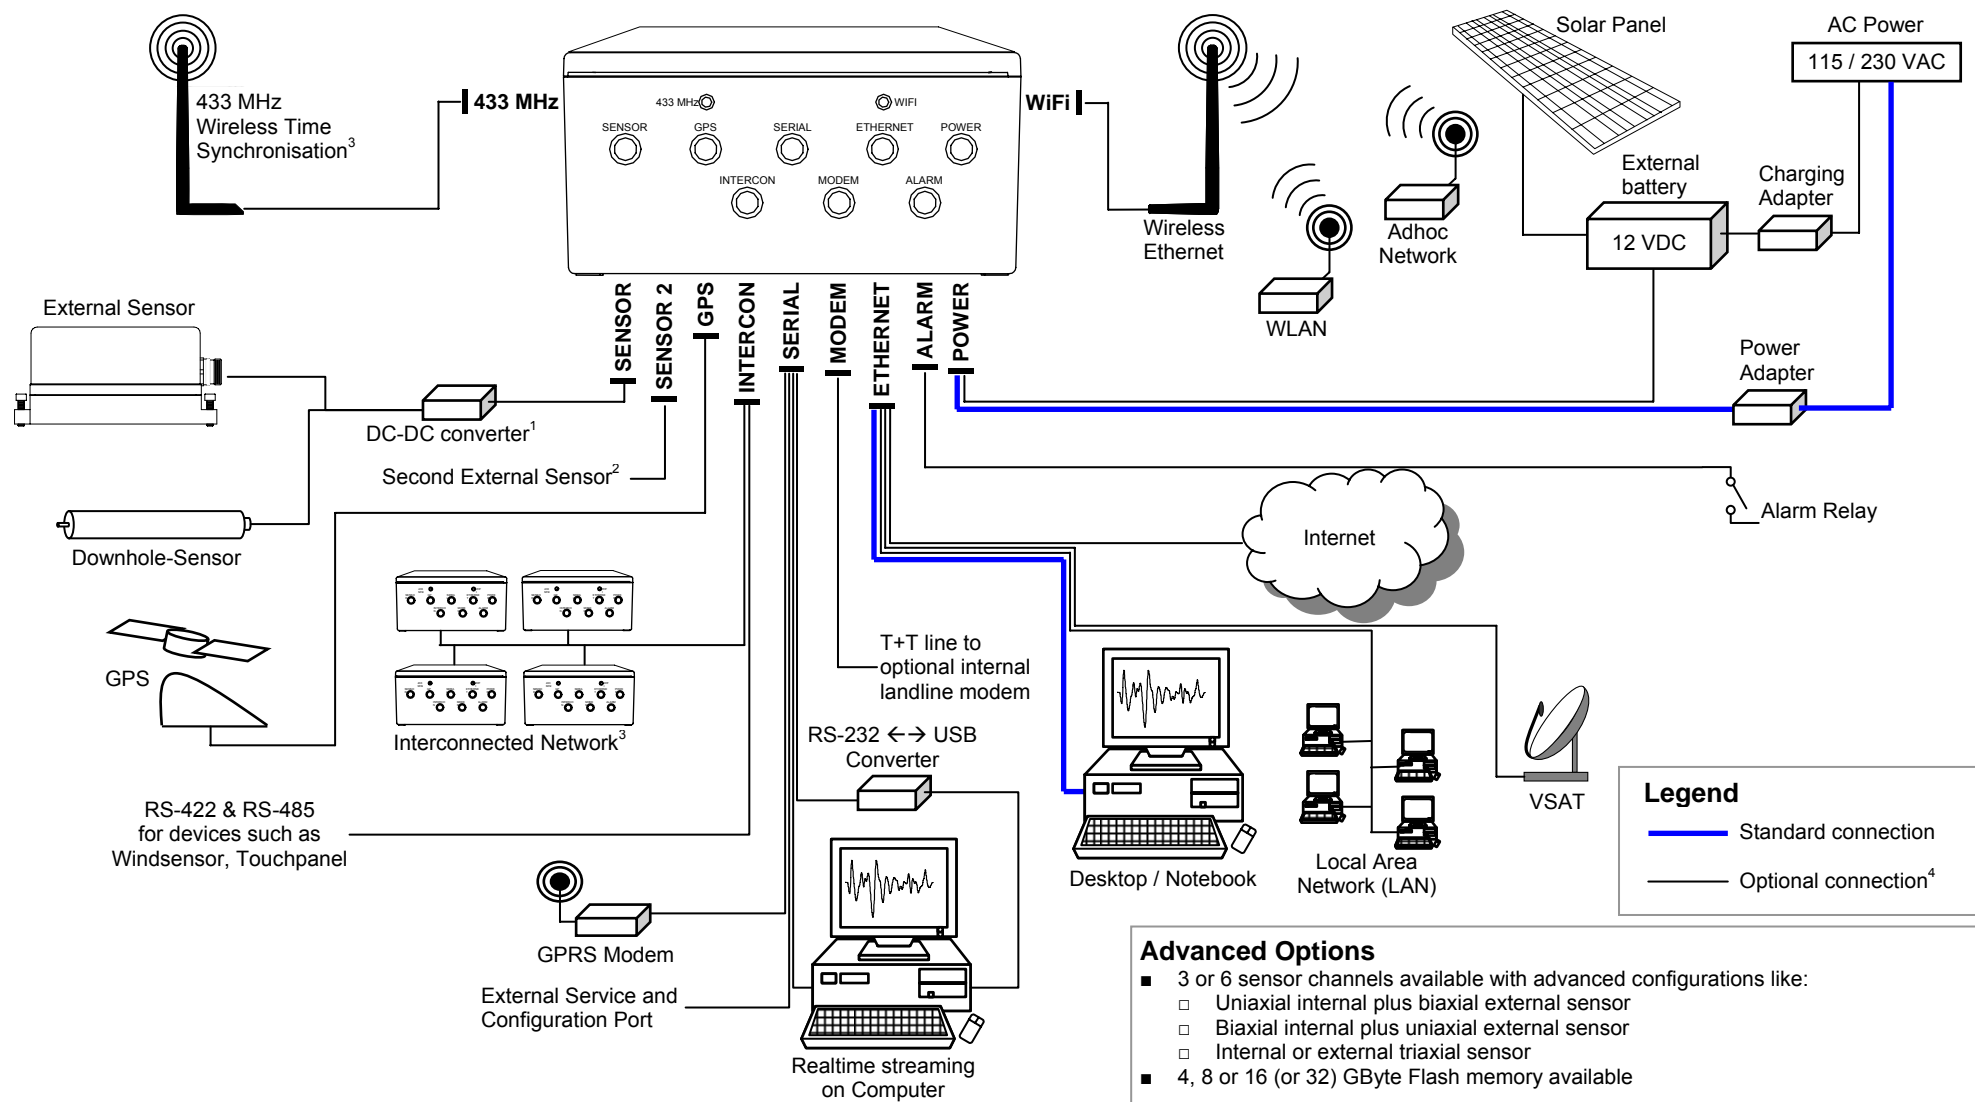

1: Needed for cables longer than 35 m during battery operation  
 2: Only for 6 channel units (GMS-xxsix)  
 3: Only Time synchronisation; common triggering and communication via Ethernet / WiFi  
 4: Optional connections may require third party devices and/or services which may not typically be provided by GeoSIG Ltd. Not all options can be used together.