

## GMS<sup>plus</sup> Measuring System

### Features


- ❑ Second generation of [NetQuakes](#) Recorder
- ❑ 3 or 6 channels, up to 1000 sps\*\*\* sampling rate up to 15 channels using digital sensors
- ❑ Low noise individual 24-bit  $\Delta-\Sigma$  ADC per channel
- ❑ Internal built-in and/or external sensors
- ❑ Wired Ethernet, Wi-Fi\*\* and Serial links
- ❑ Smart NTP timing, GPS time base, or time synchronisation via radio channel or cable
- ❑ Enhanced connectivity via landline modems, 3G cellular devices and satellite links
- ❑ Recording to SD or CF cards, up to 128 GByte
- ❑ USB interface for external storage and communication devices\*\*
- ❑ Continuous data recording to ringbuffers
- ❑ Flexible configuration of multiple triggers
- ❑ Simultaneous data streaming to several clients
- ❑ On board data processing and evaluation
- ❑ Rugged aluminium housing with levelling base plate for easy installation
- ❑ Configuration and status monitoring via Web Interface compatible with Smartphones
- ❑ Simple and secure communication over Internet with full remote management
- ❑ Internal battery, low power consumption
- ❑ Alarm output with up to 4 relays flexibly configurable for different types of events\*\*
- ❑ Easily configurable interconnected networks with common timing and triggering

### Applications

- ❑ Broadband Seismic, Earthquake and Structural measuring and monitoring
- ❑ Real-time Seismology for Freefield and Urban Areas
- ❑ High Density Earthquake Monitoring Networks
- ❑ Shake / Hazard Mapping based on Instrumental Data
- ❑ Earthquake Early Warning<sup>o</sup> and Rapid Response
- ❑ Damage Estimation, Disaster Management
- ❑ Seismic Alarm and Safe Shutdown
- ❑ Ambient Vibration Testing (optionally fully wireless)
- ❑ Induced Vibration Monitoring and Notification
- ❑ Building Code Compliant Instrumentation



## Supply and Connectivity

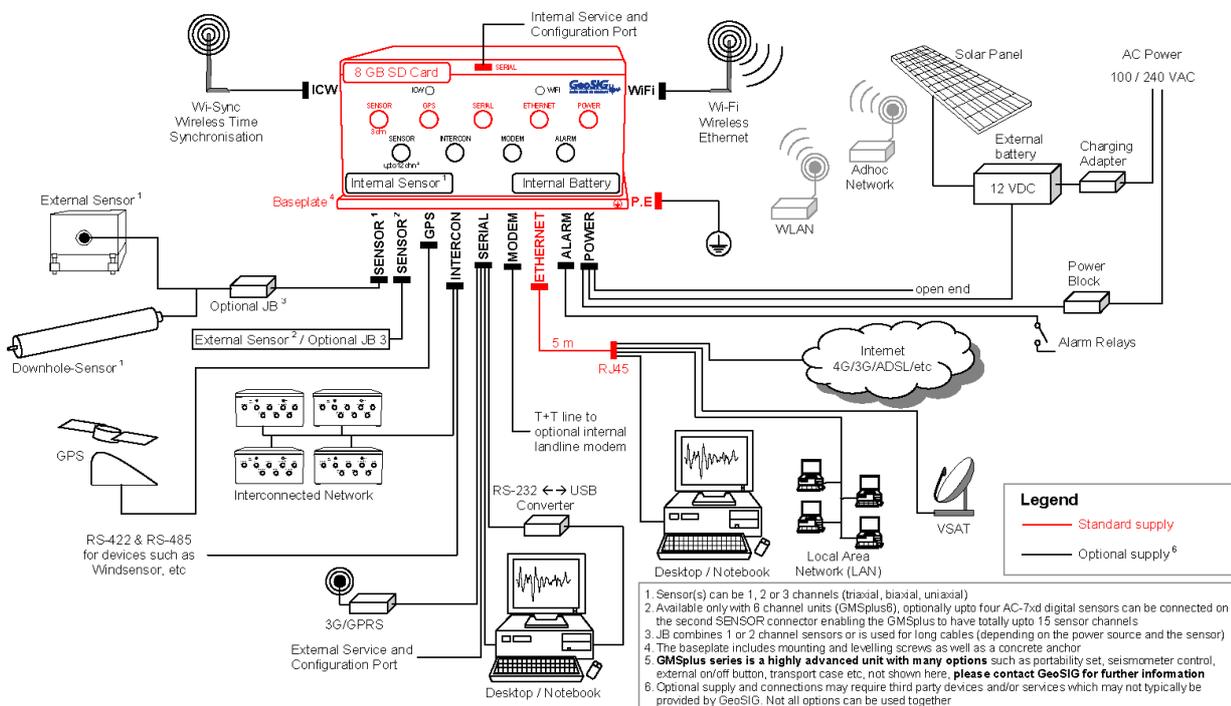

## Set-up and Configuration

An intuitive web interface is available for easy configuration with any web browser. Alternatively the configuration file in XML format can be edited on site through the instrument console, exchanged by replacing the memory card, remotely from a server or through SSH. Even if the configuration file can be manually edited at any time, a tool is provided to edit it securely.

## Data Analysis

The GeoDAS software provides basic data evaluation in the field meeting the requirements of most scientific and engineering applications. Optionally GMSplus can perform certain analyses onboard.

## Sensor

**Internal:** GMSplus can include select GeoSIG sensors internally. In that case the model name changes accordingly and the sensor levelling is achieved via the three levelling screws of the single bolt mounted base plate of the GMSplus.

**External:** All GeoSIG sensors and any other third-party sensors with following specifications can be connected to GMSplus as external sensor(s):

Sensor output:  $\pm 2.5$  V or  $\pm 10$  V; differential or single-end  
Power to sensor: 15 VDC / 600 mA

## Digitizer

Channels: 3 or 6  
optionally up to 15 using AC-7xD / AC-4xD digital sensors (max. 4 sensors)

A/D conversion: 24 bit  $\Delta-\Sigma$  converters individual for each channel  
DSP: 32 bit output word length  
Dynamic range: 146 dB (per bin @ 1 Hz rel. full scale rms)  
137 dB @ 50 sps

Sampling rate: 1000\*\*, 500, 250, 200, 100, 50 sps per channel  
Max. bandwidth: DC to 250 Hz, optionally DC to 500 Hz  
Anti Aliasing Filter: Analog and digital FIR (finite impulse response)

## CPU

Processor: ARM 400 MHz  
RAM: 128 MByte  
Operating System: GNU/Linux

## Triggering

Several Trigger Sets can be defined in the instrument. Each set can be flexibly configured regarding the source of trigger, main and advanced trigger parameters, trigger processing and selected channels for storage. A voting logic based on the monitored channels can be defined.

## Trigger Filter

Fully independent high-, low- or bandpass trigger filters can be configured.

## Level Triggering

User adjustable threshold.

## STA/LTA Triggering

User adjustable STA / LTA values and STA/LTA trigger and detrigger ratio.

## Event Recording

Pre-event memory: 1 to 720 seconds, typical  
Post-event duration: 1 to 7200 seconds, typical

## Event Summary and Parameters

Content: PGA, PGV, PGD, SA (at 0.3, 1, 3 Hz)  
Transmission delay: User defined from trigger time

## Ring Buffer

Usage: User can request an event from any period of the ring buffer by specifying the start time/date and the duration from the console or remotely from a server.  
Method: Ringbuffer files with configurable duration which can be uploaded automatically to data server.

## Data Stream

Protocol/Compatibility: GSBUS, SeedLink, compatible to Earthworm

## Storage Memory

Size and Type: 8 GByte Removable SD Card,  
Optionally Compact Flash Card  
higher capacity up to 128 GByte on request  
FAT32 or EXT4 formatted  
Management: Intelligent management of memory card capacity using policies as per file type and ring buffer capacity specification.  
Recording format: miniSEED with extended information encapsulated into blockette 2000  
Estimated Capacity: Sampling rate [sps] x 0.4 [MB / day / 3 channel]  
(example: 40 MByte / day / 3 channel @ 100 sps)  
typical, since the data is compressed, capacity depends on the context of the data.

## Self Test

- Permanent self monitoring of hardware and software components without affecting their normal operation.
- User-configurable periodical state of health (SOH) report based on comprehensive test of instrument, which can be requested at any time.
- User-configurable periodical sensor test.

## Time Base

Internal: Intelligent Adaptive Real Time Clock (IARTC)  
External: NTP, optionally GPS, Wired or Wireless Interconnection  
Standard TCXO accuracy:  $\pm 0.5$  ppm (15 s/year) @ +25 °C  
 $\pm 2.5$  ppm (75 s/year) @ -10 to +50 °C  
Optionally higher accuracy TCXO's available.  
Accuracy after learn: <  $\pm 0.5$  ppm (15 s/year or 2 ms/h)  
Accuracy with NTP: <  $\pm 4$  ms typical, assuming reasonable access to NTP servers

## Power Supply

Input voltage: 15 VDC (12.5 - 18 VDC)  
optional 9 - 36 or 18 - 75 VDC  
optional 90 - 260 VAC / 50 - 60 Hz to 15 VDC  
switched UL approved external power block  
Power consumption: 130 mA @ 12 VDC for 3 channels  
200 mA @ 12 VDC for 6 channels  
Internal battery: optional 7.2 Ah for > 24 h autonomy with intelligent charger, higher autonomy is optionally available with external batteries

## Indicators

● Green: Active Charge LED  
● Green: Run/Stop LED  
● Yellow: Event/Memory LED  
● Blue: Network link/Traffic LED  
● Red: Warning/Error LED

## Communication

Configuration, Data Retrieval\*\*\*\*: Via Ethernet, Wi-Fi, Serial line, Console, or directly via removable memory card.  
Network requirements: Fixed or Dynamic IP on Ethernet LAN and/or Internet connection with Ethernet interface optional OpenVPN  
Wi-Fi (b/g/n) network with WEP, WPA, WPA2 security and Enterprise Mode  
Security: GeoDAS proprietary protocol over SSL  
Checksum and software handshaking  
Serial ports: 2 ports standard, + 3 ports optional  
Baud rates: Console: 115200 baud  
Serial Stream: 38400, 57600, 115200 baud

## Alarm / Seismic Switch / Warning / Notification Option

Alarms: 3 independent or 4 common relay contacts for trigger alarm and/or error  
SMS notification is optionally available  
Configurable based on event triggers (NO or NC selectable during order)  
Relay Hold-On: 1 to 60 seconds (User programmable)  
Capacity: The contacts are suitable for a low voltage control. In case large load must be switched then external relays should be implemented.  
Max voltage: 125 V / 250 mA

## Interconnected Network Option

Wired or Wireless common time and trigger interconnection network, distributing GPS-grade time precision among several units is optionally available.

## Modem Option

External modems of different types, including cellular 3G/4G modems, are optionally available.

## Environment / Reliability

Operational temperature: -20 to +70 °C\*  
Storage temperature: -40 to +85 °C\*  
Humidity: 0 to 100 % RH (non condensing)  
MTBF: > 500'000 hours

## Housing

Type: Cast aluminium housing  
Size: 296 x 175 x 140 mm (W x D x H)  
Size with base plate: 296 x 225 x 156 mm (W x D x H)  
Weight: 4.7 kg (optional < 4 kg)  
0.3 kg internal sensor, 2.6 kg battery, 1.3 kg base plate, ask for other options  
Protection: IP65 (NEMA 4), optionally IP67 (NEMA 6)  
Mounting: Base plate with single bolt, surface mount.  
When base plate levelled and fixed, GMSplus can be replaced without re-levelling.  
Easy Transport: Optional portability accessories are available to facilitate short term measurements.

GMSplus series are produced in different types to suit particular specifications or regulations. Specifications mentioned in this datasheet may be different among different types.

\*: use of an internal battery may degrade this specification.

©: contact GeoSIG for the optional Earthquake Early Warning functionality.

\*\*\*\*: optional

\*\*\*: only for 3 channels instrument.

\*\*\*\*: Retrieved data can be in the following formats depending on transmission, software and storage method used: miniSEED, DAT, ASCII, SEISAN, SUDS, SAC, SEG-2, Matlab, Artemis.